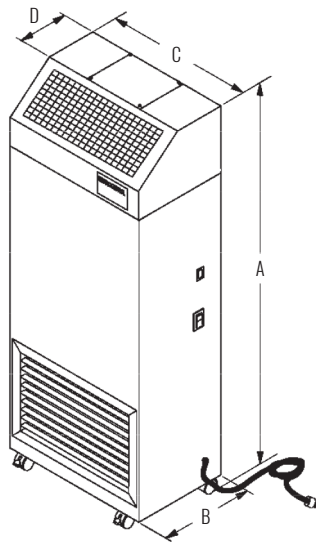
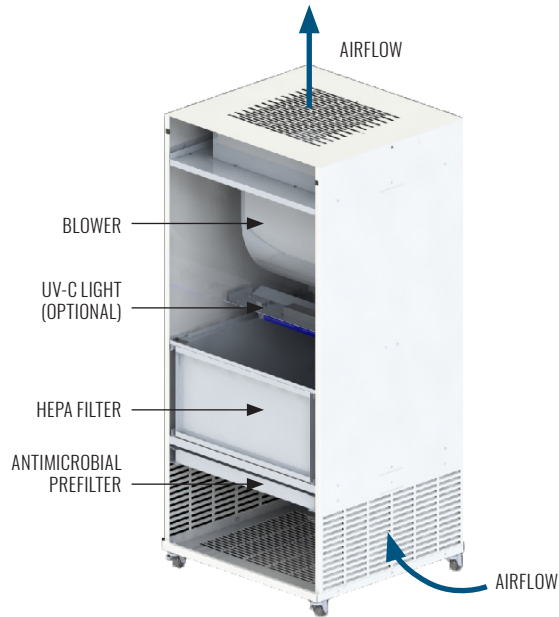


**DIMENSIONAL & PERFORMANCE DATA**

**PAC LF / HF**

**PAC MAX**

MODEL	PAC LF				PAC HF				PAC MAX	PAC MAX UV	
DESCRIPTION	120V	220V	120V	220V	120V	220V	120V	220V		120V	
UNIT DIMS in. (mm)	A	38.25 (972)				62.25 (1581)					HEIGHT: 57.75 (1467)
	B	19.75 (502)		15.75 (400)		19.75 (502)		15.75 (400)			WIDTH: 26.18 (665)
	C	23.66 (601)		23.66 (601)		23.66 (601)		23.66 (601)			DEPTH: 24.75 (629)
	D	12.86 (327)		8.86 (225)		12.86 (327)		8.86 (225)			N/A
UL LISTED (E152685)	No	No	No	No	No	No	Yes	No		Pending	
SPEED CONTROL	Variable Speed Control				Three Speed Switch					Variable Speed Control	
AIRFLOW CFM* (m <sup>3</sup> /hr)	MIN CFM: 70 (119) ± 10% MAX CFM: 400 (679) ± 10%				Low: 560 (951) ± 10% Medium: 690 (1172) ± 10% High: 800 (1359) ± 10%					MIN CFM: 400 (679) ± 10% MAX CFM: 1700 (2888) ± 10%	
POWER REQUIREMENTS	4.5 Amps @ 115V 60 Hz	2.1 Amps @ 208-230V 60 Hz	4.4 Amps @ 115V 60 Hz	2.0 Amps @ 208-230V 60 Hz	8 Amps @ 115V 60 Hz	4.0 Amps @ 208-230V 60 Hz	6.9 Amps @ 115 VAC 60 Hz	3.5 Amps @ 208-230 VAC 60 Hz		10.2 Amps @ 120V/60 Hz	
UNIT WEIGHT lbs. (kg.)	100 (45)		90 (41)		200 (91)		175 (79)		148 (67)	150 (68)	
SHIPPING WEIGHT lbs. (kg.)	173 (79)		153 (70)		285 (129)		250 (113)		173 (79)	175 (80)	
SHIPPING DIMS in. (mm)	A	47.5 (1206)				71.5 (1816)					HEIGHT: 65.75 (1670)
	B	22.75 (578)		18.75 (476)		22.75 (578)		18.75 (476)			WIDTH: 28.75 (730)
	C	26.75 (680)				26.75 (680)					DEPTH: 27.25 (692)

**NOTE:** Quiet Operation 52 dBA on low, 56 dBA on medium and 60 dBA on high speed measured 30 in. (762 mm) from face of the unit.