

## 1500/1600 SERIES LINEAR BAR GRILLE

CEILING / SIDE WALL / SILL APPLICATION  
 FRAME A, B, C, D, R, AND MF


## SUBMITTAL SHEET

### NOTES:


- Widths run from 2" to 24" in 1/4" Increments.
- The Minimum Length is 6". The Maximum Length of One Section is 6'-0" Overall. Sections can be Spliced together with Alignment Tabs & Pins, See Form GS0310
- Duct Width = Ordered Width = \_\_\_\_\_
- Duct Length = Ordered Length = \_\_\_\_\_
- Duct Size = Ceiling Opening Size = Order Size
- Units May be Used for Either Supply or Return Applications.
- Construction is Extruded Aluminum with Steel Fasteners.
- Standard Finish is 44 British White.
- Frame MF comes with Removable core held in place with Core Clips

### OPTIONAL ACCESSORIES:


- See Form GS0311 For
- Dampers
  - Linear Straightening Grid
  - Blank-Off Strips
- See Form GS0304 For:
- Mitered Corners.

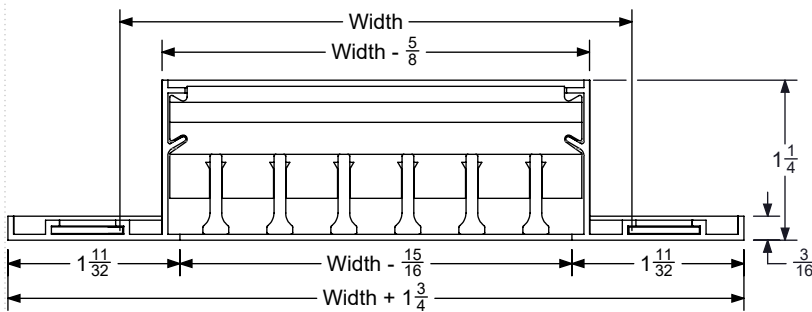


Frame A

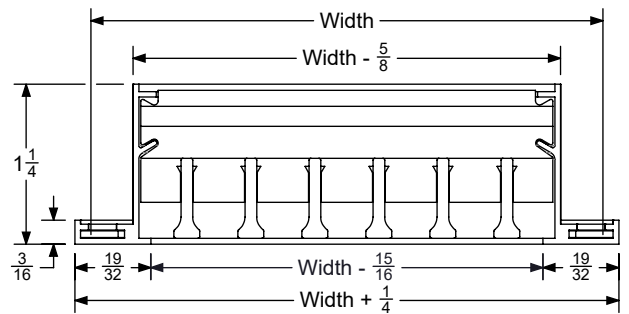


Frame D

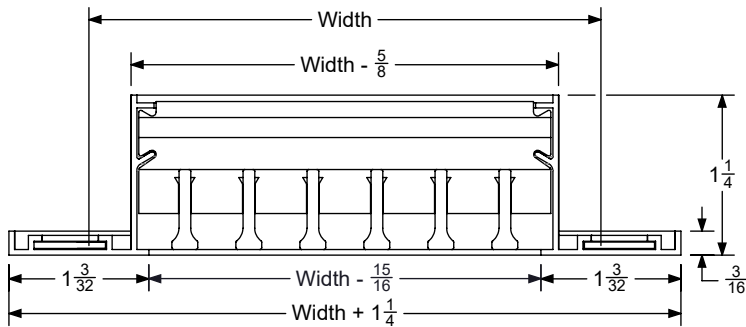


Frame B

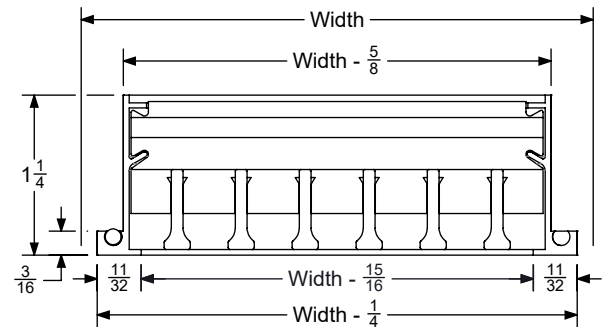

Frame R

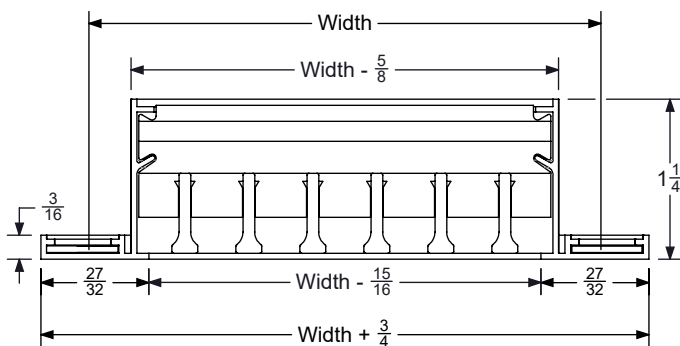

Frame C

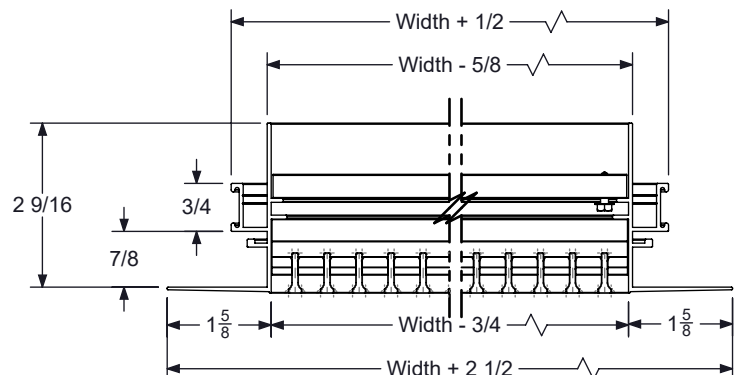


Frame MF



FRAME STYLE	FLANGE F	O.A. FACE		NECK	
		(1) END CAP	(2) END CAPS	(1) END CAP	(2) END CAPS
A	1 11/32	LENGTH + 7/8	LENGTH + 1 3/4	LENGTH - 5/16	LENGTH - 5/8
B	1 3/32	LENGTH + 5/8	LENGTH + 1 1/4	LENGTH - 5/16	LENGTH - 5/8
C	27/32	LENGTH + 3/8	LENGTH + 3/4	LENGTH - 5/16	LENGTH - 5/8
D	19/32	LENGTH + 1/8	LENGTH + 1/4	LENGTH - 5/16	LENGTH - 5/8
R	11/32	LENGTH - 1/8	LENGTH - 1/4	LENGTH - 5/16	LENGTH - 5/8
MF	1 5/8	LENGTH + 1 1/4	LENGTH + 2 1/2	LENGTH - 5/16	LENGTH - 5/8

**NOTES:**



1. ALIGNMENT TABS & PINS ARE ONLY INCLUDED ON ORDERS OVER 72" IN LENGTH
2. \*MAX BLADE SUPPORT BAR SPACING IS 9"
3. FRAME MF HEIGHT DIMENSION MATCHES PAGE 1

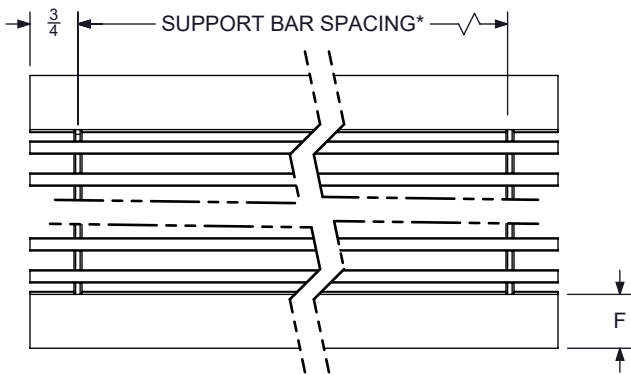

□ BUTT CUT

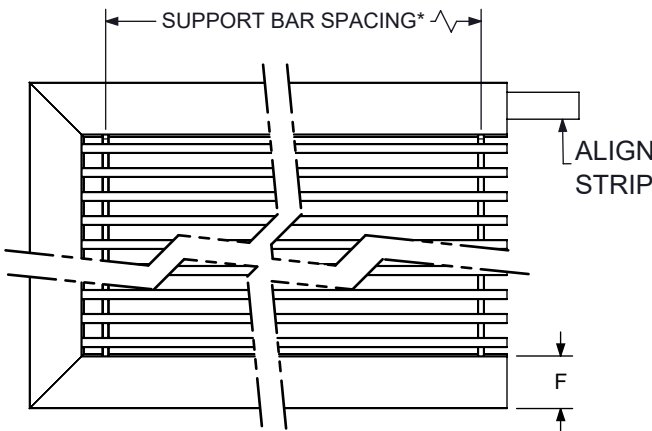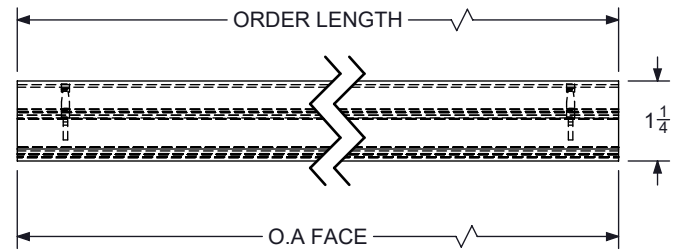

□ (1) END CAP

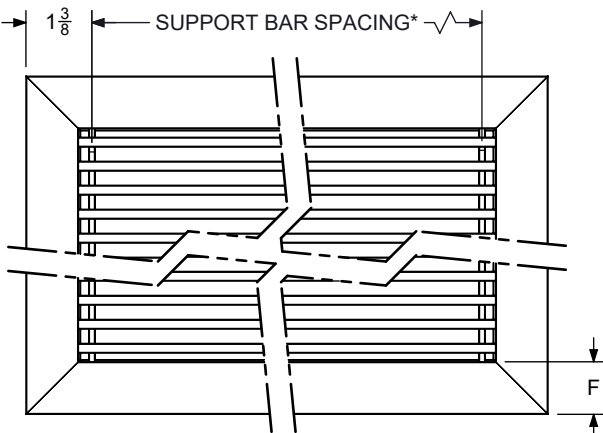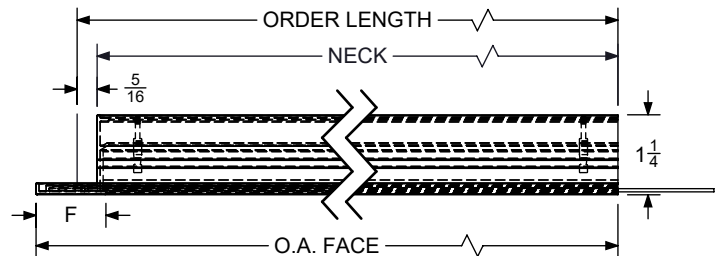

□ (2) END CAPS

