



5DMGSU

Single Deflection Universal Duct Mounted Grille - Aluminum Construction

SUBMITTAL SHEET

SIDE VIEW



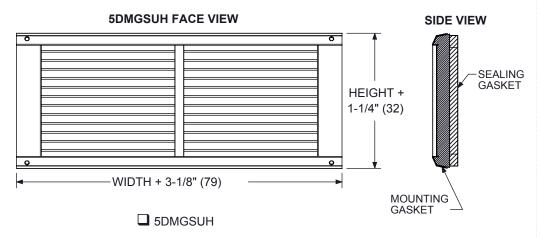

HEIGHT - 1/4" (6) SEALING GASKET 1-1/4" (32) 2-1/8" (54)

SIDE SECTION VIEW

SEALING GASKET HEIGHT + 1-1/4" (32) WIDTH + 3-1/8" (79) MOUNTING GASKET

NOTES:

- ALL ALUMINUM CONSTRUCTION
- DESIGNATION: 5DMGDRH HORIZONTAL FRONT DEFLECTORS, 5DMGDRV - VERTICAL FRONT DEFLECTORS
- 3. STANDARD FINISH 44 WHITE OR 81 CLEAR ANODIZED.
- 4. DIMENSIONS ARE INCHES (MM)
- 5. DUCT DIAMETER AVAILABLE IN EVEN SIZES ONLY.
- 6. 3/4" BLADE SPACING
- GASKET MATERIAL IS POLYURETHANE FOAM AND WILL COMPRESS WHEN INSTALLED
- 8. HOLE OPENING IS EQUAL TO ORDERED WIDTH X HEIGHT

Height	3	4	6	8	10
Duct Diameter (Min / Max)	6 / 36	10 / 36	12 / 36	20 / 36	24 / 36
(Min / Max)					
Width (Min / Max)		10 / 48		14 /48	16 / 48

Revision Date: 3/20/2024 Form: GSD007.3 Replaces: GSD007.2

5DMGSUV FACE VIEW

☐ 5DMGSUV





JOB NAME ENGINEER CONTRACTOR TAG

5DMGSU WITH DAMPER/EXTRACTOR

Single Deflection Universal Duct Mounted Grille - Aluminum Construction

SUBMITTAL SHEET

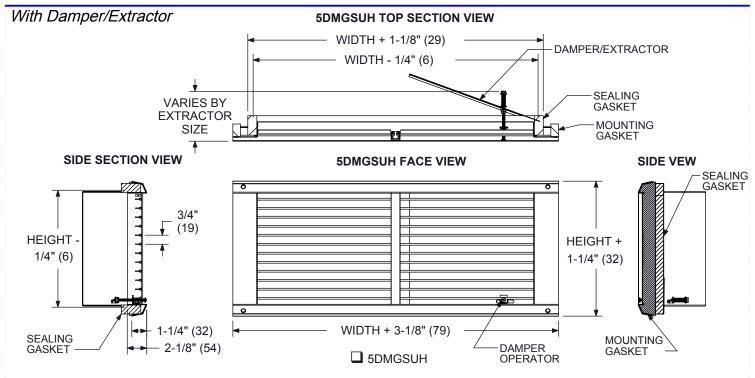

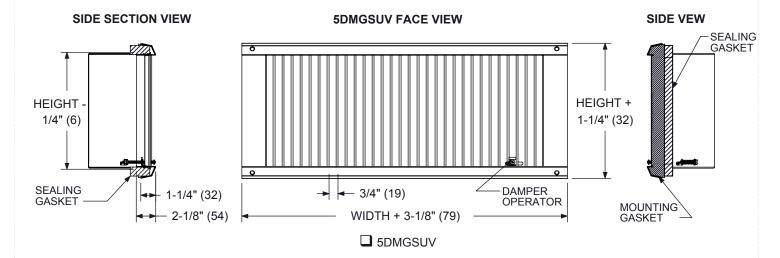

NOTES:

- ALL ALUMINUM CONSTRUCTION
- DESIGNATION: 5DMGDRH HORIZONTAL FRONT DEFLECTORS, 5DMGDRV - VERTICAL FRONT DEFLECTORS
- 3. STANDARD FINISH 44 WHITE OR 81 CLEAR ANODIZED.
- 4. DIMENSIONS ARE INCHES (MM)
- 5. DUCT DIAMETER AVAILABLE IN EVEN SIZES ONLY.
- 6. 3/4" BLADE SPACING
- 7. GASKET MATERIAL IS POLYURETHANE FOAM AND WILL COMPRESS WHEN INSTALLED
- 8. HOLE OPENING IS EQUAL TO ORDERED WIDTH X HEIGHT

Height	3	4	6	8	10
Duct Diameter	6/36	10 / 36	12 / 36	20 / 36	24 / 36
(Min / Max)	0 / 30	10 / 30	12 / 30	20 / 30	24 / 30
Width		10 / 48	1/ //8	16 / 48	
(Min / Max)	10 / 40			14 /40	10 / 40

Revision Date: 3/20/2024 Form: GSD007.3 Replaces: GSD007.2