

## Introduction: 51350

The 51350 series minimum security grilles feature heavy duty aluminum bars fixed at 0° with an extruded aluminum frame. This design allows for a secure area in a humid environment without the confining appearance of other security grilles. The aluminum fixed bars are reinforced by aluminum tubes utilizing mandrel construction, insuring the aluminum bars are not removable from the grille.

### MODEL

51350 - Minimum security aluminum grille with fixed 3/16" x 3/4" blades set at 0° on 1/2" centers.

### FEATURES

- Extruded aluminum frame.
- 5/16" Diameter tube is expanded to lock blades in place and reinforced full length by 1/4" diameter aluminum rod.
- 1/8" Thick aluminum stitch welded sleeve.
- 30"x30" Maximum single unit size.
- 6", 8", 10", 12", 14", 16", and 18" Sleeve lengths or no sleeve.

### ACCESSORIES

- Unpainted aluminum angle frame shipped loose for field installation, constructed of 1 1/2"x1 1/2"x1/8" angle.
- Aluminum 1/2" diameter security bars on 6" centers.
- Aluminum 3"x1/2" diameter anchor bars.
- Two unpainted loose aluminum angles shipped loose for field installation, constructed of 1 1/2"x1 1/2"x1/8" angle.
- Front or rear operated OBD.

### FINISHES


- Standard finish is #44 British White.
- Optional finish is Mill.



51350

## 51350 Dimensional Information

### 51350, FACE VIEW

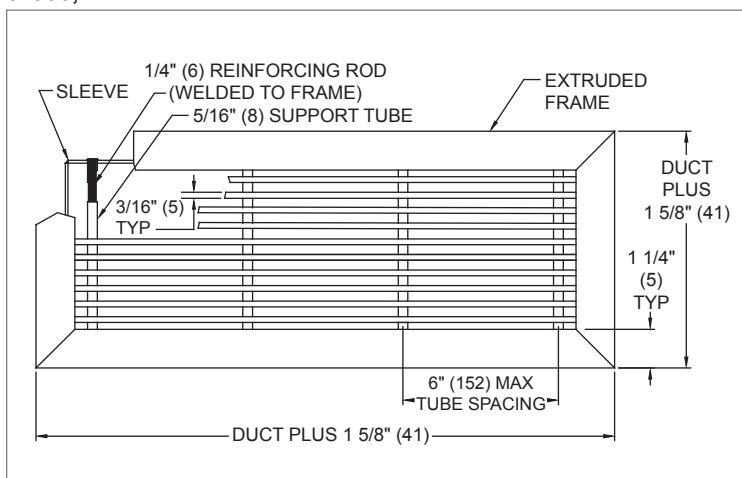

NOTE: Dimensions in parentheses are mm.

### 51350, CROSS SECTION

