

INTRODUCTION

The 9880 series stainless steel double-adjustable grilles allow air spread to be set left, right, up and down concurrently for maximum versatility. These grilles feature $\frac{3}{4}$ " on center blade spacing and are available for surface mount or lay-in T-bar applications.

MODEL

9880 - Double Deflection Supply Grille


FEATURES

- 304 Stainless steel construction (316 optional)
- Sturdy front and rear deflection blades spaced on $\frac{3}{4}$ " centers
- Adjustable blades
- Countersunk screw holes in mounting frame
- Horizontal or vertical blades (H or V)
- Standard finish is 90 - #4 Satin Polish or 44 - British White

ACCESSORIES

- Stainless steel OBD welded to unit, adjustable from face of grille (model 90BD).
- Plaster frame (model 98PF).
- Square to round adapter (model 9SRA).

DIMENSIONAL DATA

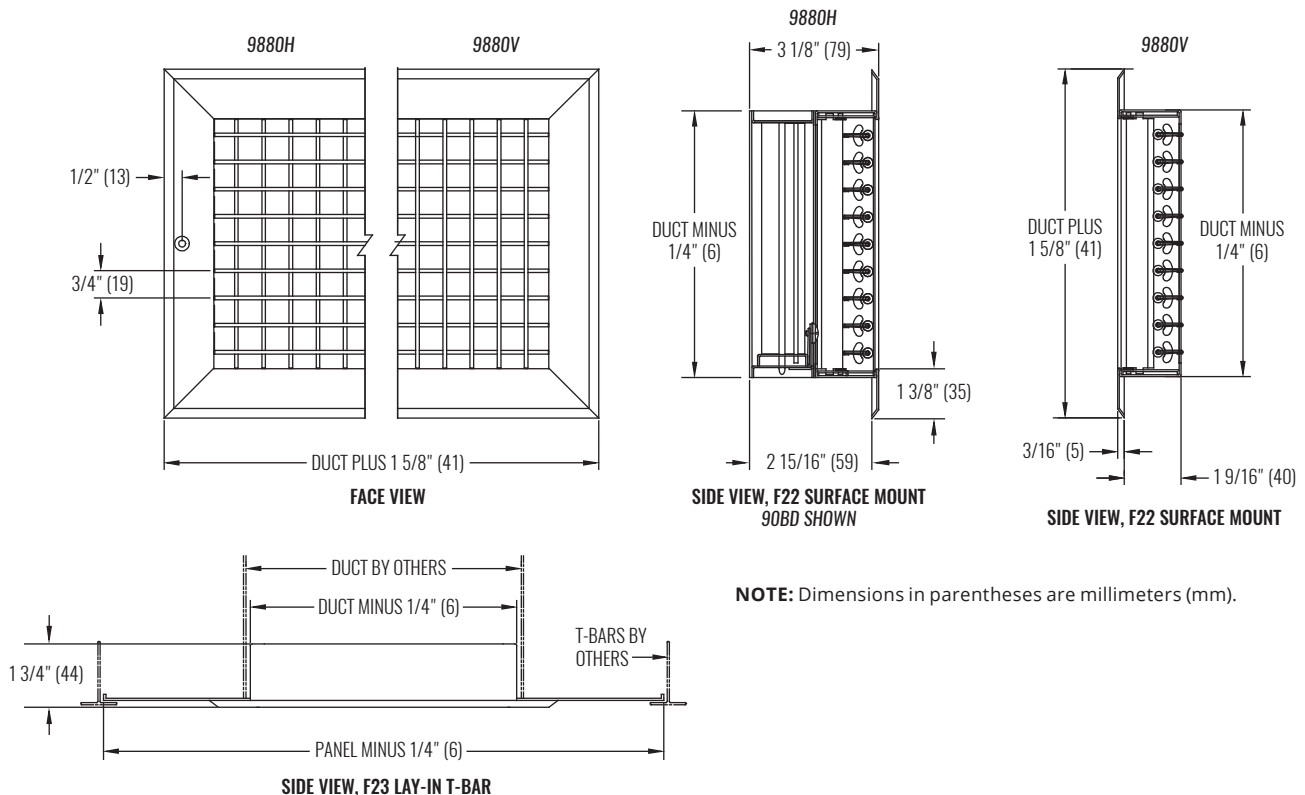

NOTE: Dimensions in parentheses are millimeters (mm).