

#### STANDARD FEATURES:

- 22 Ga. Zinc coated steel construction.
- **NEMA 1** steel control enclosure for electronic components
- 1/2" thick dual density fiberglass insulation meeting **NFPA 90A** and **UL 181** safety requirements.
- Four quadrant averaging cross flow sensor
- Hot water coils. See form TS0005 for dimensions and specifications
- Variety of analog and digital control packages for pressure independent systems.
- **AHRI** certified sound ratings

**NOTE:** Right hand configuration shown, left hand available.

**DIMENSIONS ARE GIVEN AS INCHES (MM)**

#### OPTIONAL FEATURES:


- 20 Ga. Zinc coated steel construction
- Liners:
  - 1/2" dual density fiberglass
  - 1" dual density fiberglass
  - Perforated double wall 1/2"
  - Perforated double wall 1"
  - 1/2" Cellular - fibre free
- Linear averaging sensor.
- 24 Volt transformer
- Left hand control
- Left hand water coil connection
- Disconnect switch for electronic controls
- Dust tight control enclosure.
- Bottom access panel
- Cam lock bottom access panel
- Hanger Brackets
- None
- Steriliner
- Sterilwall 1/2"
- Sterilwall 1"
- 1" Cellular - fibre free
- Right Hand Control
- Right Hand Water Coil Connection

INLET SIZE	NOM MAX CFM(L/s)	W	H	A	B	C	D	Lc	
								1 ROW	2 ROW
4	230 (109)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	1 1/8 (29)	3 7/8 (98)	5 (127)	7 1/4 (184)
5	360 (170)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	1 1/8 (29)	4 7/8 (124)	5 (127)	7 1/4 (184)
6	520 (245)	12 (305)	8 (203)	3 3/8 (86)	1 1/2 (38)	1 1/8 (29)	5 7/8 (149)	5 (127)	7 1/4 (184)
7	710 (335)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	1/8 (3)	6 7/8 (175)	5 (127)	7 1/4 (184)
8	925 (437)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	1/8 (3)	7 7/8 (200)	5 (127)	7 1/4 (184)
20	2100 (991)	16 1/4 (406)	10 (254)	2 7/8 (73)	3 5/8 (92)	1/8 (3)	N/A	5 (127)	7 1/4 (184)

## LMHS

### LOW PROFILE HOT WATER HEAT WITH ATTENUATOR

## SUBMITTAL SHEET

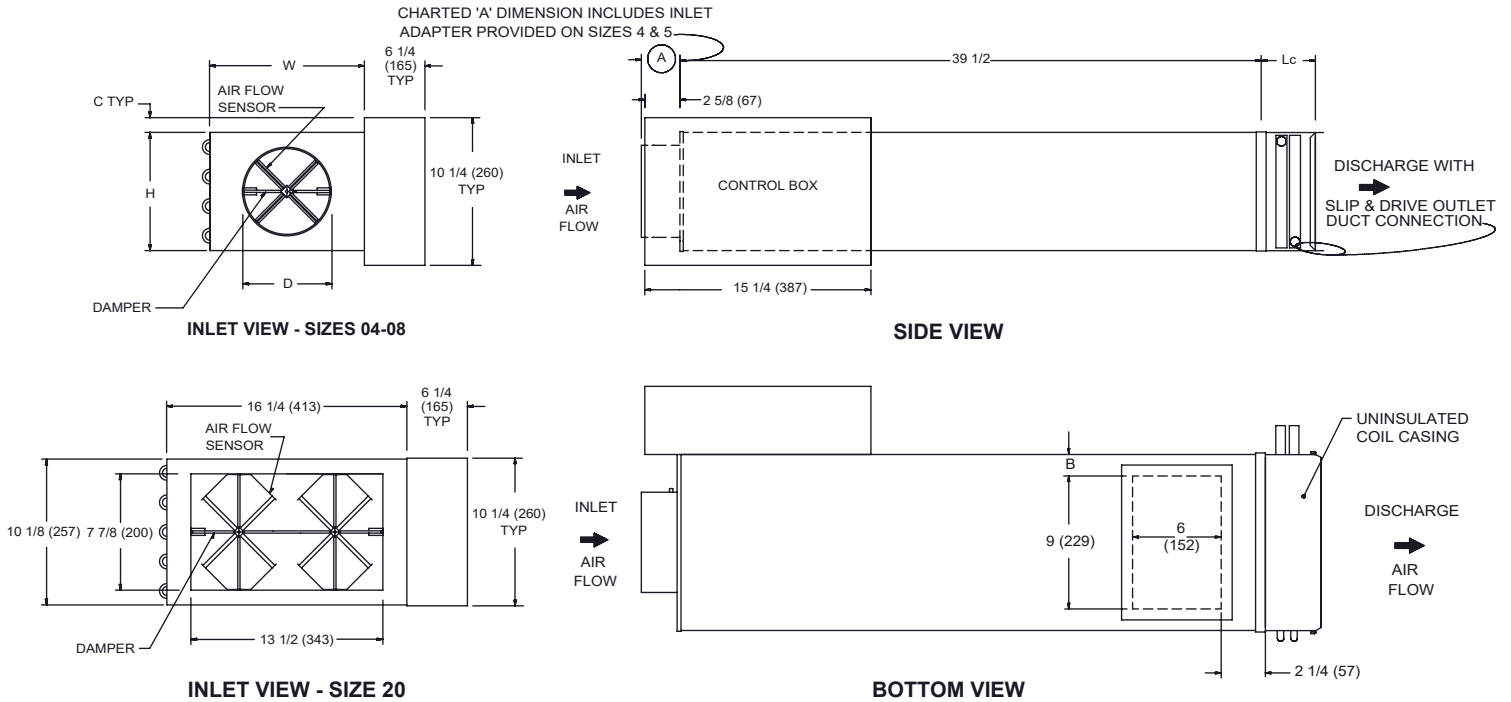

#### STANDARD FEATURES:

- 22 Ga. Zinc coated steel construction.
- **NEMA 1** steel control enclosure for electronic components
- 1/2" thick dual density fiberglass insulation meeting **NFPA 90A** and **UL 181** safety requirements.
- Four quadrant averaging cross flow sensor
- Hot water coils. See form TS0005 for dimensions and specifications
- Variety of analog and digital control packages for pressure independent systems.
- AHRI certified sound ratings

**NOTE:** Right hand configuration shown, left hand available.

#### OPTIONAL FEATURES:

- 20 Ga. Zinc coated steel construction
- Liners:
  - 1/2" dual density fiberglass
  - 1" dual density fiberglass
  - Perforated double wall 1/2"
  - Perforated double wall 1"
  - 1/2" Cellular - fibre free
- Linear averaging sensor.
- 24 Volt transformer
- Disconnect switch for electronic controls
- Dust tight control enclosure.
- Left hand control
- Left hand water coil connection
- Bottom access panel
- Cam lock bottom access panel
- Hanger Brackets
- None
- Steriliner
- Sterilwall 1/2"
- Sterilwall 1"
- 1" Cellular - fibre free
- Right Hand Control
- Right Hand Water Coil Connection

**DIMENSIONS ARE GIVEN AS INCHES (MM)**

INLET SIZE	NOM MAX CFM(L/s)	W	H	A	B	C	D	Lc	
								1 ROW	2 ROW
4	230 (109)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	1 1/8 (29)	3 7/8 (98)	5 (127)	7 1/4 (184)
5	360 (170)	12 (305)	8 (203)	5 3/8 (136)	1 1/2 (38)	1 1/8 (29)	4 7/8 (124)	5 (127)	7 1/4 (184)
6	520 (245)	12 (305)	8 (203)	3 3/8 (86)	1 1/2 (38)	1 1/8 (29)	5 7/8 (149)	5 (127)	7 1/4 (184)
7	710 (335)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	1/8 (3)	6 7/8 (175)	5 (127)	7 1/4 (184)
8	925 (437)	12 (305)	10 (254)	3 3/8 (86)	1 1/2 (38)	1/8 (3)	7 7/8 (200)	5 (127)	7 1/4 (184)
20	2100 (991)	16 1/4 (406)	10 (254)	2 7/8 (73)	3 5/8 (92)	1/8 (3)	N/A	5 (127)	7 1/4 (184)