


**AFA - DISPLACEMENT VENTILATION**

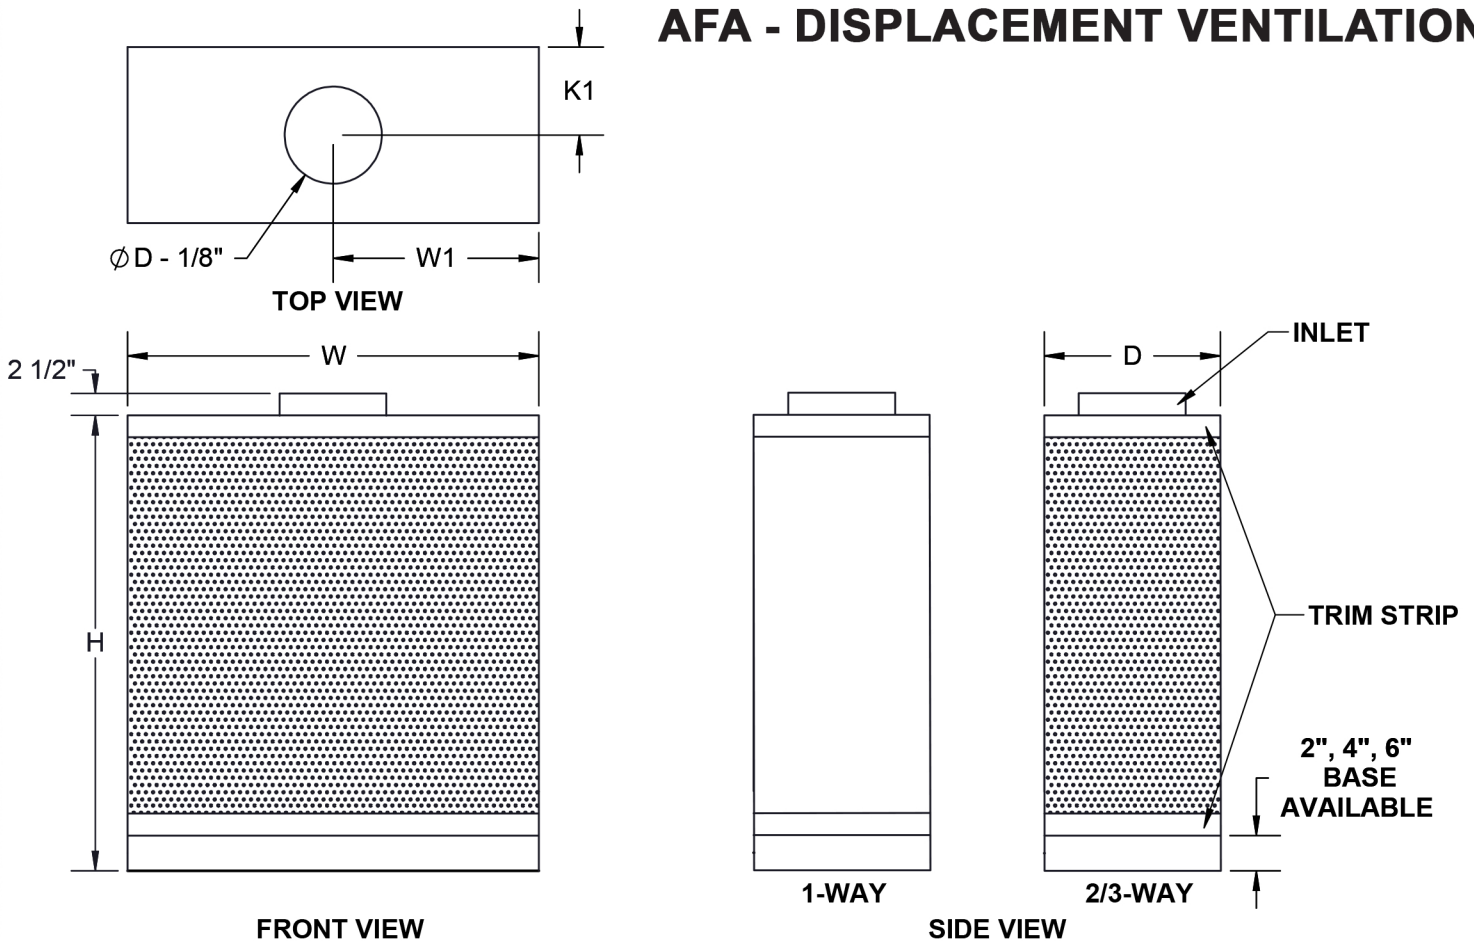

AFA SIZE (NOMINAL W x H)	DIFFUSER DIMENSIONS						$\phi D$
	W	H	D	W1	K1		
22"x21"	21 5/8"	21 3/8"	9 3/4"	10 4/5"	4 1/8"	6"	
22"x45"	21 5/8"	45"	11 5/16"	10 4/5"	4 7/8"	8"	
26"x53"	26"	53 1/4"	13 1/8"	13"	5 4/5"	10"	
33"x63"	32 11/16"	63 1/8"	15 1/2"	16 1/3"	7 1/5"	12"	
39"x79"	39 3/16"	78 7/8"	18 7/8"	19 3/5"	8 2/3"	16"	
47"x79"	47 1/16"	78 7/8"	15 7/16"		7 4/5"	40"x12"	
24"x24"	24"	24"	13"	12"	6 1/2"	8", 10", 14"x6"	
24"x48"	24"	48"	13"	12"	6 1/2"	8", 10", 14"x6", 16"x8"	
24"x60"	24"	60"	13"	12"	6 1/2"	8", 10", 14"x6", 16"x8"	
36"x48"	36"	48"	16"	18"	8"	10", 12", 16"x8"	
36"x60"	36"	60"	16"	18"	8"	10", 12", 16"x8", 18"x8", 24"x8"	
48"x24"	48"	24"	13"	24"	6 1/2"	8", 10", 14"x6", 16"x8"	
48"x36"	48"	36"	16"	24"	8"	10", 12", 16"x8", 18"x8"	
60"x24"	60"	24"	13"	30"	6 1/2"	8", 10", 14"x6", 16"x8"	
60"x36"	60"	36"	16"	30"	8"	10", 12", 16"x8", 18"x8"	

**STANDARD FEATURES:**

- 20 GA front panel
- Horizontal low velocity discharge at floor level or vertical discharge from ceiling
- Can be installed flush to the wall or to the ceiling
- Detachable front panel and removable baffle enables cleaning of the unit and duct work.
- Duct connection with integral gasket at the top, bottom, side, or back

**OPTIONAL FEATURES:**

➤ Supply Air Duct Collar Location:

- ☐ Top      ☐ Right  
☐ Left      ☐ Back

➤ Trim Strip:

- ☐ White Vinyl  
☐ Black Vinyl  
☐ Metal  
(Painted to Match)

➤ Installation Base:

- ☐ None  
☐ 2" Base Height  
☐ 4" Base Height  
☐ 6" Base Height

➤ Material:

- ☐ Galvanized  
☐ Stainless Steel

➤ Pattern:

- ☐ One Way      ☐ Two Way Right  
☐ Three Way      ☐ Two Way Left

➤ Front Panel Thickness:

- ☐ 20 GA. Front Panel  
☐ 16 GA. Front Panel

➤ Duct Cover

- ☐ Perforated  
Length \_\_\_\_\_  
☐ Solid  
Length \_\_\_\_\_

➤ Finish

\_\_\_\_\_