

**MODEL**

- EGCX - Sightproof egg crate return

**FEATURES**

- 1/2"x1/2"x1" completely sightproof aluminum cube core
- 1 1/4" flange
- Specifiable, industry exclusive!

**GRILLE SIZES**

- 10" x 10"
- 22" x 10"
- 22" x 22"
- 46" x 22"

**FRAME STYLES**


- F22 - Surface mount <sup>1</sup>

**COMPATIBLE OPTIONS AND ACCESSORIES**


- Screw holes
- 8PF - Steel plaster frame
- 58PF - Aluminum plaster frame
- SRAC325 - Steel, square to round adapter
- DS - Debris screen (1/4" mesh) or IS - Insect screen (1/16" mesh)

NOTES: Not all options available with all configurations. Many options not compatible with other options. Size limitations on accessories. See website for complete compatibility.

<sup>1</sup> Sized to fit lay-in T-bar ceiling applications. Choose no screw holes for lay-in.

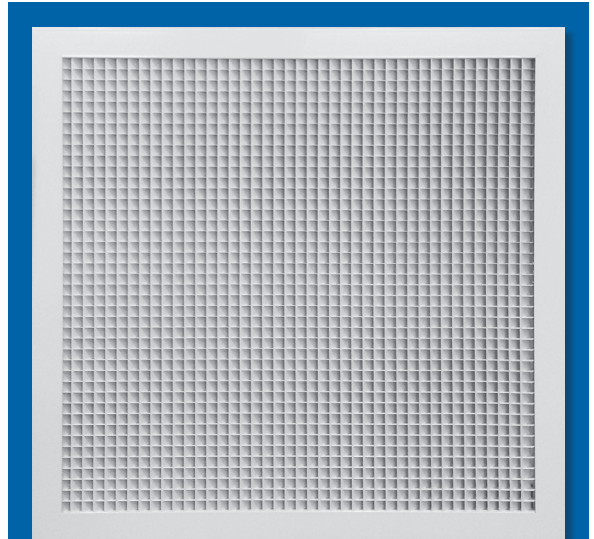

## DIMENSIONAL DATA

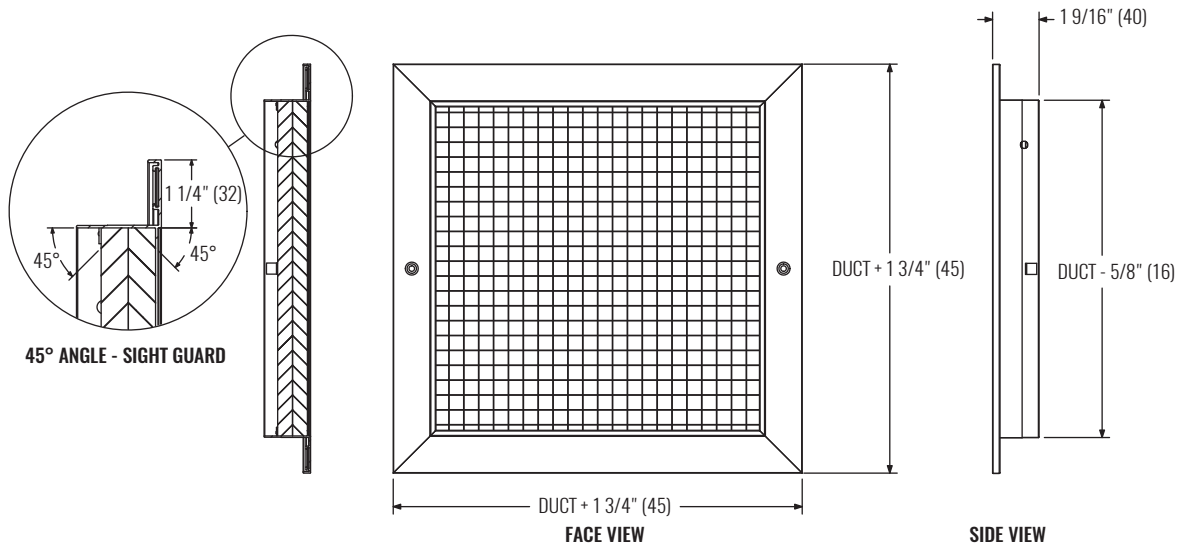

NOTES: Dimensions in parentheses are millimeters (mm).

## PERFORMANCE DATA

SIZE	PERFORMANCE		SEE BACK SUPPLEMENT FOR DESIGN INFORMATION
	NC (< 25)	NC (25 - 40)	
NOMINAL	CFM	CFM	
10"x10"	119 - 178	191 - 297	NOTES: Information shown is abbreviated. See website for complete information. Dimensions in parentheses are millimeters (mm). NC ranges are based on octave band 2 - 7 sound power levels minus a room absorption of 10dB, re 10 <sup>-12</sup> Watts. Data was obtained from tests conducted in accordance with ANSI/ASHRAE Standard 70, ISO Standard 5219, and ISO Standard 3741.
22"x10"	273 - 378	399 - 615	
22"x22"	549 - 784	843 - 1254	
46"x22"	1002 - 1502	1627 - 2504	