

INTRODUCTION

The Krueger 1240P/51240P/1240PE series of modular core perforated diffusers are one of Krueger's most versatile designs, combining excellent performance with on-the-job flexibility. The 1240P/51240P/1240PE series diffusers exhibit typical isothermal throws of 10' to 15' for 4-way air distribution and 35' to 50' for 1-way air distribution. The perforated face conceals the interior modular cores for an uninterrupted ceiling appearance. The modular cores are factory set for a 4-way air pattern, but may be field adjusted for 1-, 2- or 3-way air patterns. The modular capability makes the 1240P/51240P/1240PE ideal for installations with changing air pattern requirements such as tenant lease spaces.

MODELS

- 1240P - Modular Core Diffuser with Perforated Face and Architectural Frame, Steel Construction
- 51240P - Modular Core Diffuser with Perforated Face and Architectural Frame, Aluminum Construction
- 1240PE - Modular Core Diffuser with Perforated Face and Single Border, Steel Construction

FEATURES

- Hand-removable modular cores.
- Variety of discharge air patterns

PANEL SIZE


- 24"x24"

ACCESSORIES


- Damper for 1240P (Model OBD1240, 5OBD1240)
- Damper for 51240P and 1240PE (Model OBD)
- Straightening Grid (Model SSG)

FINISHES



- Standard finish is #44 British White
- Optional finishes available

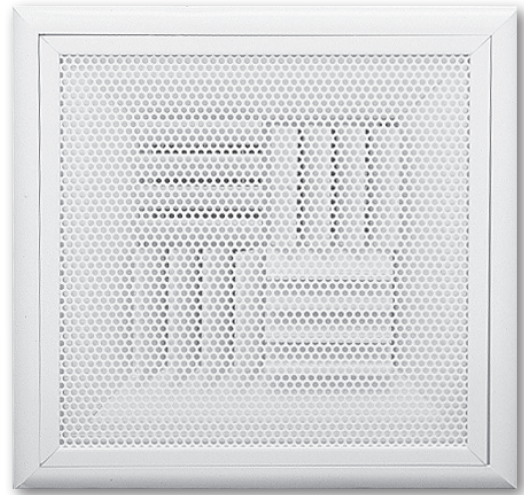

1240P

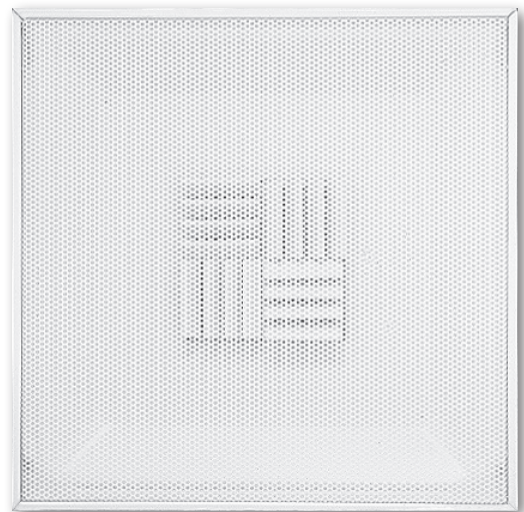

1240PE



The areas encircled represent one core. Each core represents one quarter section of the diffuser.

EXAMPLE: Two core throw will show two of the four cores facing in the same direction. Three core throw will show three of the four cores facing in the same direction.